

507, 049

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
18 September 2003 (18.09.2003)


PCT

(10) International Publication Number
WO 03/076762 A1

- (51) International Patent Classification⁷: **E21B 43/10, 7/20**
- (21) International Application Number: PCT/NO03/00077
- (22) International Filing Date: 6 March 2003 (06.03.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
20021179 8 March 2002 (08.03.2002) NO
- (71) Applicant and
(72) Inventor: SANGESLAND, Sigbjørn [NO/NO]; Okstadbrinken 10, N-7074 Tiller (NO).
- (74) Agent: PROTECTOR INTELLECTUAL PROPERTY CONSULTANTS AS; P.O. Box 5074 Majorstuen, N-0301 Oslo (NO).
- (81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: METHOD AND DEVICE FOR LINER SYSTEM

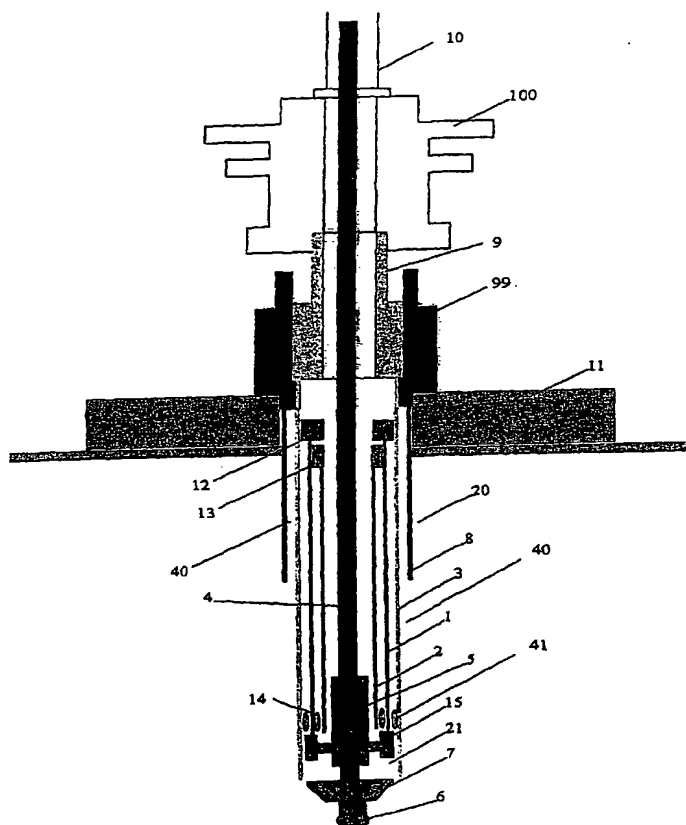

(57) Abstract: Method for drilling and lining a well wherein at least one liner (1, 2, 32) with a larger external diameter than the substantial part of a drilling riser (10) is pre-installed at a point below the substantial part of the drilling riser (10). A bore hole section (21) is drilled after the drilling riser (10) has been installed, the bore hole section having a larger diameter than the at least one pre-installed liner (1, 2, 32). The at least one pre-installed liner (1, 2, 32) is subsequently lowered into the bore hole section (21, 22). A drilling and liner system for implementing the method is also described.



WO 03/076762 A1